

**Power Tools Electric | SAFE WORK METHOD STATEMENT (SWMS)**

**TASK OR ACTIVITY: Power Tools Electric**

Business Name: [Company Name]	ABN: [ABN]	SWMS#
Business Address: [Company Address]		
Contact Person:	Phone: [Phone]	Email:

**THIS SAFE WORK METHOD STATEMENT IS APPROVED BY THE PCBU OF THE PROJECT**

Under the Work Health and Safety Regulation (WHS Regulation), a person conducting a business or undertaking (PCBU) is required to ensure that a safe work method statement (SWMS) is prepared before the proposed work starts.

Full Name:

Signature: \_\_\_\_\_ Title: \_\_\_\_\_ Date: \_\_\_\_\_

Details of the person(s) responsible for ensuring implementation, monitoring and compliance of the SWMS, as well as reviews and modifications of the SWMS.

Full Name: \_\_\_\_\_ Title: \_\_\_\_\_ Phone: \_\_\_\_\_

**ALL PERSONNEL PARTICIPATING IN ANY ACTIVITY ON THIS SWMS MUST HAVE THE FOLLOWING COMMUNICATED** | **NAME AND DATED SIGNATURE OF ALL RELEVANT PERSONNEL WHO HAVE BEEN CONSULTED AND COMMUNICATED TO IN THE DEVELOPMENT AND APPROVAL OF THIS SWMS**

	NAME	SIGNATURE	DATE
Safety meetings or toolbox talks will be scheduled in accordance with legislative requirements to first identify any site hazards, then to communicate those hazards and then to further take steps to either eliminate or control each hazard.			
If an incident or a near miss occurs, all work must stop immediately. Depending on the severity of the incident, a meeting will be called with all workers to amend the SWMS if required. The meeting may also be an educational opportunity.			
Any changes made to the SWMS after an incident or a near miss must be approved by the Person Conducting Business or Undertaking and communicated to all relevant personnel.			
The SWMS must be kept and be available for inspection at least until the work is completed. Where a SWMS is revised, all versions should be kept. If a notifiable incident occurs in relation to which the SWMS relates, then the SWMS must be kept for at least two years from the occurrence of the notifiable incident.			

**CLIENT OR PRINCIPAL CONTRACTOR DETAILS**

Client:	SCOPE OF WORKS Provide a detailed description of the specific work being carried out (otherwise known as scope of works).
Project Name:	
Project Address:	
Project Manager:	
Contact Phone:	
Project Manager Signature:	
Date SWMS supplied to Project Manager:	

**ANY HIGH-RISK CONSTRUCTION WORK BEING CARRIED OUT**

<input type="checkbox"/> involves a risk of a person falling more than 2 meters.	<input type="checkbox"/> is carried out on or near pressurised gas mains or piping.
<input type="checkbox"/> is carried out on a telecommunication tower.	<input type="checkbox"/> is carried out on or near chemical, fuel or refrigerant lines.
<input type="checkbox"/> involves demolition of an element of a structure that is load-bearing.	<input type="checkbox"/> is carried out on or near energised electrical installations or services.
<input type="checkbox"/> involves demolition of an element related to the physical integrity of a structure.	<input type="checkbox"/> is carried out in an area that may have a contaminated or flammable atmosphere.
<input type="checkbox"/> involves, or is likely to involve, disturbing asbestos.	<input type="checkbox"/> involves tilt-up or precast concrete.
<input type="checkbox"/> involves structural alteration or repair that requires temporary supports to prevent collapse.	<input type="checkbox"/> is carried out on, in or adjacent to a road, railway, shipping lane or other traffic corridor.
<input type="checkbox"/> is carried out in or near a confined space.	<input type="checkbox"/> is carried out in an area of a workplace where there is any movement of powered mobile plant.
<input type="checkbox"/> is carried out in/near a shaft or trench deeper than 1.5m or tunnel involving use of explosives.	<input type="checkbox"/> is carried out in areas with artificial extremes of temperature.
<input type="checkbox"/> is carried out in or near water or other liquid that involves a risk of drowning.	<input type="checkbox"/> involves diving work.

**ANY HIGH-RISK MACHINERY OR EQUIPMENT NEARBY**

<input type="checkbox"/> Forklift	<input type="checkbox"/> Crane/s	<input type="checkbox"/> Hoist/s	<input type="checkbox"/> Excavator	<input type="checkbox"/> Backhoe/Loader	<input type="checkbox"/> Boom Lift	<input type="checkbox"/> EWP	<input type="checkbox"/> Genie Lift
<input type="checkbox"/> Trencher	<input type="checkbox"/> Drilling Rig	<input type="checkbox"/> Trucks	<input type="checkbox"/> Formwork	<input type="checkbox"/> Bobcat	<input type="checkbox"/> Flammable Gas	<input type="checkbox"/> Fuel	<input type="checkbox"/> Dozer
<input type="checkbox"/> High Voltage	<input type="checkbox"/> Mulcher	<input type="checkbox"/> Tilt-up Panels	<input type="checkbox"/> Roller	<input type="checkbox"/> Scissor Lift	<input type="checkbox"/> Tractor	<input type="checkbox"/> Other -	

**RISK MATRIX**

LIKELIHOOD	INSIGNIFICANT	MINOR	MODERATE	MAJOR	CATASTROPHIC	SCORE	ACTION	HEIRARCHY OF CONTROLS
ALMOST CERTAIN	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4 ACUTE			<b>Elimination</b> Remove the hazard.
LIKELY	2 MODERATE	3 HIGH	3 HIGH	4 ACUTE	4 ACUTE	4A ACUTE	DO NOT PROCEED	<b>Substitution</b> Replace the hazard.
POSSIBLE	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	4 ACUTE	3H HIGH	Review before work starts.	<b>Isolation</b> Isolate People from the hazard
UNLIKELY	1 LOW	1 LOW	2 MODERATE	3 HIGH	4 ACUTE	2M MODERATE	Ensure control measures in place.	<b>Engineering</b> Isolate the hazard.
RARE	1 LOW	1 LOW	2 MODERATE	3 HIGH	3 HIGH	1L LOW	Monitor and keep records	<b>Administrative</b> Change the work. <b>PPE</b>

**Notes on Hierarchy of Controls:** Elimination methods are the most effective and preferred when controlling a hazard. Substitution is the second most effective method of controlling a hazard. Engineering by isolation is the third most effective, while Administrative Controls by changing the work is the fourth most effective method. PPE (Personal Protective Equipment) is the least effective method.

**PERSONAL PROTECTIVE EQUIPMENT (PPE)**

FOOT PROTECTION	HAND PROTECTION	HEAD PROTECTION	HEARING PROTECTION	EYE/FACE PROTECTION	RESPIRATORY PROTECTION	FACE PROTECTION	HIGH-VIS CLOTHING	PROTECTIVE CLOTHING	FALL PROTECTION	SUN PROTECTION	HAIR/JEWELLERY SECURED
<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>


Select the appropriate PPE above suitable for the equipment used or the job task being performed (if applicable).

**Note:** A SWMS must be reviewed regularly to make sure it remains effective. A SWMS must be reviewed (and revised if necessary) if relevant control measures are revised. The review process should be carried out in consultation with workers (including contractors and subcontractors) who may be affected by the operation of the SWMS and their health and safety representatives who represented that work group at the workplace.

When a SWMS has been revised, the person conducting a business or undertaking must ensure all:

1. persons involved in the work are advised that a revision has been made and how they can access the revised SWMS;
2. persons who will need to change a work procedure or system as a result of the review are advised of the changes in a way that will enable them to implement their duties consistently with the revised SWMS; and,
3. workers that will be involved in the work are provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
1. Preparation	Electric shock, Flying debris	3M	<ul style="list-style-type: none"> <li>- Ensure all power tools are properly inspected and maintained prior to use, checking for cracked casings, frayed cords, or other visible damage that may compromise the tool's safety.</li> <li>- Verify that electrical outlets and extension cords being used are free from damage, supplying the correct voltage, and can provide adequate grounding.</li> <li>- Confirm that all team members working in the area have been trained in proper use and handling of electrical power tools, specifically focusing on their potential hazards and control measures.</li> <li>- Enforce the use of appropriate personal protective equipment (PPE) for workers who will be operating power tools, including safety glasses or goggles, hearing protection, and gloves if necessary.</li> <li>- Create a well-organised work area, with enough space for employees to use power tools safely and without any obstructions, while keeping bystanders at a safe distance.</li> <li>- Implement a system for labeling and isolating damaged or malfunctioning power tools, to ensure they do not inadvertently end up back in the workplace before undergoing repair or replacement.</li> <li>- Provide appropriate storage solutions for power tools when not in use, ensuring cords are neatly coiled and all sharp blades or drill bits are stored securely to prevent injury.</li> <li>- Develop an emergency response plan, complete with first aid kits and eyewash stations located in close proximity to the worksite, to effectively address any incidents related to electrical shocks or flying debris injuries.</li> <li>- Encourage workers to report any hazards or near misses involving power tools immediately, allowing for quick corrective action to be taken by supervisors.</li> <li>- Educate team members about the dangers of using cords or hoses in a way that might create tripping hazards and advise them on how to minimise the risk.</li> <li>- Utilise appropriate barriers and/or signage to designate the specific work area where power tools are in use, warning others to proceed with caution or avoid the area altogether.</li> <li>- Install ground-fault circuit interrupter (GFCI) protection on all outlets or extension cords used for power tools, to help prevent the risk of electrical shock.</li> <li>- Routinely assess each employee's work habits and use of power tools, offering feedback and additional training as needed to prevent complacency or poor technique that may lead to injury.</li> <li>- Encourage all workers to adopt a "safety-first" mindset by regularly reviewing the importance of hazard identification and implementing control measures to minimise risks associated with the use of electric power tools.</li> </ul>	1L	
2. Tool Inspection	Faulty equipment, Tool malfunction	3H		1L	

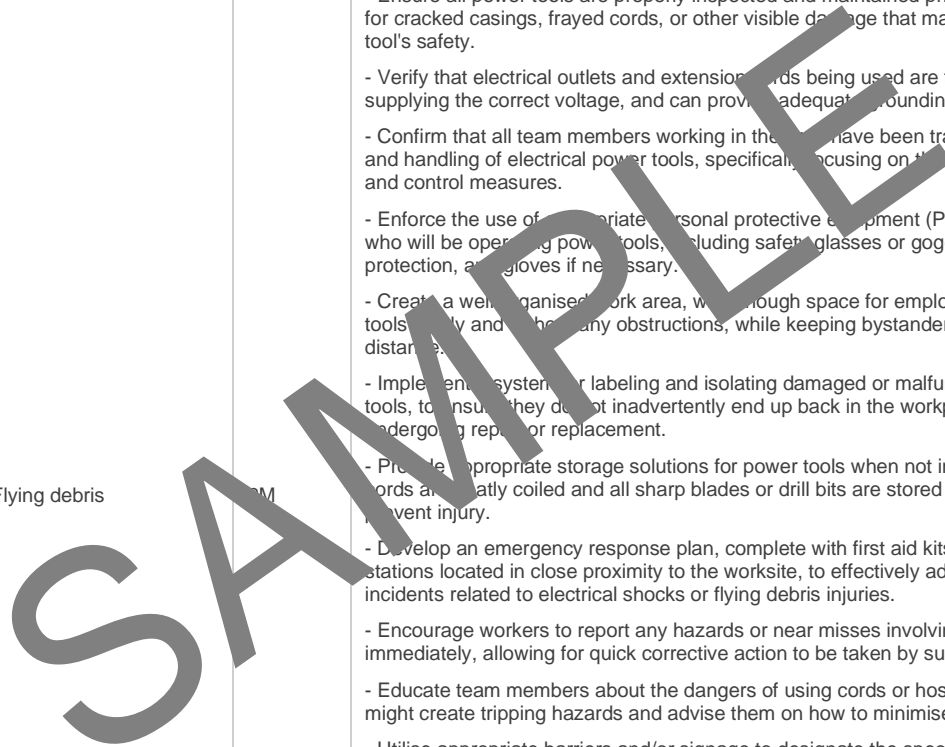

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			<ul style="list-style-type: none"> <li>- Regular inspection and maintenance: Inspect all power tools before use, ensuring that they are functioning properly and free from defects. Set up a routine maintenance schedule to keep them in good working condition.</li> <li>- Emergency Stop function: Ensure that the power tool is fitted with an E-stop function that is easily accessible for users in case of any malfunction or emergency situation.</li> <li>- Proper training: Provide adequate training to all employees using electric power tools, focusing on correct handling and operation techniques to minimise risk.</li> <li>- User manual: Ensure that the user manual is available and accessible to all employees, outlining correct usage, safety instructions, and maintenance guidelines.</li> <li>- Protective equipment: Provide appropriate personal protective equipment (PPE), including gloves, safety goggles, and ear protection, to be worn by employees when operating electric power tools.</li> <li>- Overload protection devices: Use power tools that have built-in overload protection devices to prevent overheated motors and electrical fires in case of malfunction.</li> <li>- Power cord management: Keep power cords tidy and away from walkways to prevent tripping hazards. Inspect power cords regularly for signs of wear, fraying, or other damage and replace them as needed.</li> <li>- Tool storage: Store power tools safely in designated areas when not in use, ensuring that they are disconnected and de-energised.</li> <li>- Lockout/tagout procedures: Implement lockout/tagout procedures to prevent accidental startup when servicing or repairing electrical power tools. Clearly label all equipment undergoing maintenance.</li> <li>- Reporting faulty equipment: Encourage employees to report any faulty or damaged equipment, as well as near misses or accidents involving power tools, so that appropriate corrective actions can be taken promptly.</li> </ul>		
3. Workspace Setup	Inadequate lighting, Cluttered workspace	2M	<ul style="list-style-type: none"> <li>- Ensure that adequate lighting is provided in the work area, using either natural light or appropriate artificial lighting such as floodlights or portable light stands.</li> <li>- Conduct a thorough assessment of the workspace before beginning any tasks, to identify and mitigate any hazards associated with poor lighting and a cluttered workspace.</li> <li>- Set up designated storage areas for materials, tools, and equipment, to keep them organised and prevent clutter from accumulating in the work area.</li> <li>- Regularly clean and maintain the workspace throughout the project, removing any debris, waste material, or other obstructions that could pose a risk to workers.</li> <li>- Utilise clear, visible signage to communicate potential hazards, such as wet floor signs, warning notices, or "authorised personnel only" signs.</li> <li>- Establish and enforce a strict housekeeping policy, requiring all employees to clean up after themselves and maintain an orderly work environment.</li> </ul>	1L	

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			<ul style="list-style-type: none"> <li>- Allow sufficient breaks for workers to clean up their immediate work area and return tools and equipment to their designated storage locations.</li> <li>- Provide ergonomic tool stations and benches for workers to store electric power tools when not in use, keeping them off the ground and away from walkways.</li> <li>- Cordon off any specific hazardous areas within the work space, using safety barriers, cones, or tape, to create a physical barrier between workers and potential hazards.</li> <li>- Assign responsibility for regularly inspecting the work area for hazards to a designated health and safety officer or site supervisor, ensuring ongoing compliance with relevant WHS regulations.</li> <li>- Invest in regular training sessions for all employees on the proper use and storage of electrical power tools, emphasising the importance of maintaining a safe and clean work environment.</li> <li>- Ensure all employees report any incidents or near misses involving inadequate lighting, or cluttered workspaces, so corrective action can be taken immediately and future incidents prevented.</li> </ul>		
4. Personal Protective Equipment	Incorrect or ill-fitting PPE, absent PPE	3H	<p>[REDACTED]</p> <p>[REDACTED]</p> <p>[REDACTED]</p> <p>[REDACTED]</p> <p>[REDACTED]</p> <p>[REDACTED]</p> <p>[REDACTED]</p> <p>[REDACTED]</p> <p>[REDACTED]</p>	1L	

SAMPLE

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[REDACTED]		
5. Power Connection	Overloading circuits, Improper grounding	3H	[REDACTED]	1L	

SAMPLE

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[REDACTED]		
6. Initial Cutting/Drilling	Flying debris, Vibration injuries	2M	[REDACTED]	1L	

SAMPLE



JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
7. Changing Accessories	Accidental tool starts incorrect accessory fitment	3H	[REDACTED]	1L	
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		

SAMPLE

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
8. Adjusting Guard Position	Tool kickback, Exposure to moving parts	2M	[REDACTED]	1L	
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		

SAMPLE

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
9. Ongoing Cutting/Drilling	Heat injuries, Noise exposure	3H	[REDACTED]	2M	
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		
			[REDACTED]		

SAMPLE







JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[REDACTED]		
12. Tool Storage & Maintenance	Incorrect storage, Damaged tool	1L	[REDACTED]	1L	

SAMPLE

JOB STEP	POTENTIAL HAZARDS	IR	CONTROL MEASURES	RR	RESPONSIBLE PERSON
SPECIFIC WORK STEPS	HAZARDS THAT MAY ARISE	INITIAL RISK	SPECIFIC MEASURES TO BE PUT IN PLACE TO ELIMINATE OR CONTROL THE RISKS	RESIDUAL RISK	NAME OF PERSON
			[REDACTED]		
			[REDACTED]		

SAMPLE



**EMERGENCY RESPONSE – CALL 000 FOR EMERGENCIES**

Ensure to have an Emergency Management Plan in place as well as adequate numbers of trained first aid staff with easy access to fully stocked first aid kits, rescue equipment, material safety data sheets, adequate access to emergency communication equipment and fire-fighting equipment suitable for all classes of fire and ignition sources.

**LEGISLATIVE REFERENCES**

RELEVANT LEGISLATION AND CODES OF PRACTICE. DELETE THE LEGISLATIVE REFERENCES FOR ANY STATE THAT ARE NOT APPLICABLE

<p><b>Queensland &amp; Australian Capital Territory</b>                  Work Health and Safety Act 2011                  Work Health and Safety Regulations 2011                  Legislation QLD: <a href="https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws">https://www.worksafe.qld.gov.au/laws-and-compliance/work-health-and-safety-laws</a>                  Codes of Practice QLD: <a href="https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice">https://www.worksafe.qld.gov.au/laws-and-compliance/codes-of-practice</a>                  Legislation ACT: <a href="https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations">https://www.worksafe.act.gov.au/laws-and-compliance/acts-and-regulations</a>                  Codes of Practice ACT: <a href="https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice">https://www.worksafe.act.gov.au/laws-and-compliance/codes-of-practice</a></p>	<p><b>Victoria</b>                  Occupational Health and Safety Act 2004                  Occupational Health and Safety Regulations 2017                  Legislation VIC: <a href="https://www.worksafe.vic.gov.au/occupational-health-and-safety-act-and-regulations">https://www.worksafe.vic.gov.au/occupational-health-and-safety-act-and-regulations</a>                  Codes of Practice VIC: <a href="https://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice">https://www.worksafe.vic.gov.au/compliance-codes-and-codes-practice</a></p>
<p><b>New South Wales</b>                  Work Health and Safety Act 2011                  Work Health and Safety Regulations 2017                  Legislation NSW: <a href="https://www.safework.nsw.gov.au/legal-obligations/legislation">https://www.safework.nsw.gov.au/legal-obligations/legislation</a>                  Codes of Practice NSW: <a href="https://www.safework.nsw.gov.au/resource-library/list-of-codes-of-practice">https://www.safework.nsw.gov.au/resource-library/list-of-codes-of-practice</a></p>	<p><b>Western Australia</b>                  Work Health and Safety Act 2020                  Work Health and Safety Regulations 2022                  Legislation Western Australia: <a href="https://www.commerce.wa.gov.au/worksafe/legislation">https://www.commerce.wa.gov.au/worksafe/legislation</a>                  Codes of Practice WA: <a href="https://www.commerce.wa.gov.au/worksafe/codes-practice">https://www.commerce.wa.gov.au/worksafe/codes-practice</a></p>
<p><b>Northern Territory</b>                  Work Health and Safety (National Uniform Legislation) Act 2011                  Work Health and Safety (National Uniform Legislation) Regulations 2011                  Legislation NT: <a href="https://worksafe.nt.gov.au/laws-and-compliance/workplaces-and-laws">https://worksafe.nt.gov.au/laws-and-compliance/workplaces-and-laws</a>                  Codes of Practice NT: <a href="https://worksafe.nt.gov.au/laws-and-compliance/codes-of-practice">https://worksafe.nt.gov.au/laws-and-compliance/codes-of-practice</a></p>	<p><b>Safe Work Australia Links</b>                  Law and Regulation (All States): <a href="https://www.safeworkaustralia.gov.au/law-and-regulation">https://www.safeworkaustralia.gov.au/law-and-regulation</a>                  Model Codes of Practice: <a href="https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice">https://www.safeworkaustralia.gov.au/resources-publications/model-codes-of-practice</a></p>
<p><b>South Australia</b>                  Work Health and Safety Act 2012 (SA)                  Work Health and Safety Regulations 2012 (SA)                  Legislation for SA: <a href="https://www.safework.sa.gov.au/resources/legislation">https://www.safework.sa.gov.au/resources/legislation</a>                  Codes of Practice for SA: <a href="https://www.safework.sa.gov.au/workplaces/codes-of-practice#COPs">https://www.safework.sa.gov.au/workplaces/codes-of-practice#COPs</a></p>	<p><b>Model Codes of Practice</b></p> <ul style="list-style-type: none"> <li>- Managing noise and preventing hearing loss at work</li> <li>- Confined spaces</li> <li>- Labelling of workplace hazardous chemicals</li> <li>- Managing risks of hazardous chemicals in the workplace</li> <li>- Welding processes</li> <li>- First aid in the workplace</li> <li>- Managing the risk of falls at workplaces</li> <li>- Hazardous manual tasks</li> <li>- Managing the risk of falls in housing construction</li> <li>- Managing electrical risks in the workplace</li> <li>- Demolition work</li> <li>- Excavation work</li> <li>- Work health and safety consultation, cooperation and coordination</li> <li>- Managing the work environment and facilities</li> <li>- How to manage work health and safety risks</li> <li>- Managing risks of plant in the workplace</li> <li>- Construction work</li> </ul>
<p><b>Tasmania</b>                  Work Health and Safety Act 2012                  Work Health and Safety (Transitional and Consequential Provisions) Act 2012                  Work Health and Safety Regulations 2012                  Work Health and Safety (Transitional) Regulations 2012                  Legislation for TAS: <a href="https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations">https://worksafe.tas.gov.au/topics/laws-and-compliance/acts-and-regulations</a>                  Codes of Practice for TAS: <a href="https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice">https://worksafe.tas.gov.au/topics/laws-and-compliance/codes-of-practice</a></p> <p>Details of permits, licenses or access required by regulatory bodies (add or delete as required):</p> <ul style="list-style-type: none"> <li>- Permits from local council</li> <li>- Authorisation to commence work</li> <li>- Any required documents.</li> </ul>	

**SIGNATORIES OF THE SAFE WORK METHOD STATEMENT**

The signed and dated personnel listed below have cooperated in the consultation and development of this Safe Work Method Statement which has been approved by the Person/s Conducting a Business or Undertaking (PCBU). In signing this Safe Work Method Statement each individual acknowledges and confirms that they have read this SWMS in full, having raised any questions for items on this Safe Work Method Statement that require clarification, and confirms that they are competent, skilled and knowledgeable for the task assigned to them. Every person acknowledges that they have received the relevant training and qualifications where required, before carrying out any work contained in this Safe Work Method Statement. By signing this Safe Work Method Statement each individual agrees to work safely, to follow any safe work instructions which are provided, and agrees to use all Personal Protective Equipment where appropriate.

Worker Name	Position	Signature	Date	Time	Supervisor
			Date:		
			Date:		
			Date:		
			Date:		
			Date:		
			Date:		
			Date:		

**SAFE WORK METHOD STATEMENT MONITORING AND REVIEW**

**The SWMS must be reviewed regularly** to make sure it remains effective and must be reviewed (and revised if necessary) if relevant control measures are needed. The review process should be carried out in consultation with workers (including contractors and subcontractors) who may be affected by the operation of the SWMS and their health and safety representatives who represented that work group at the workplace.

When the SWMS has been revised the PCBU must ensure that all persons involved with the work are advised that a revision has been made and how they can access the revised SWMS, including all persons who will need to change a work procedure or system as a result of the review are advised of the changes in a way that will enable them to implement their duties consistently with the revised SWMS. All workers that will be involved in the work must be provided with the relevant information and instruction that will assist them to understand and implement the revised SWMS.

**The SWMS must be monitored regularly** for the effectiveness of ensuring hazard controls are effective in reducing the risk of incidents, keeping the workplace safe for all personnel. The person responsible for monitoring the effectiveness of the Safe Work Method Statement should employ a multi-faceted approach which includes but is not limited to:

1. Spot Checks.
2. Consultation with workers, contractors and sub-contractors.
3. Internal audits on a continual basis.

An approach of continuous improvement, promptly recording inconsistencies or deficiencies, followed up by immediate corrective action and consultation with all relevant personnel ensures that the PCBU is consistently developing ever-improving systems of safe work principles.

REVIEW NUMBER	<input type="checkbox"/> 1	<input type="checkbox"/> 2	<input type="checkbox"/> 3	<input type="checkbox"/> 4	<input type="checkbox"/> 5	<input type="checkbox"/> 6	<input type="checkbox"/> 7
NAME							
INITIALS							
DATE							

**SAFE WORK METHOD STATEMENT REVIEW CHECKLIST**

This Safe Work Method Statement Review Checklist is to be followed and used upon initial development of the SWMS to help ensure that all steps have been adequately taken before work commences. Think of this document as an internal audit review checklist before commencing work, and may form part of a Toolbox Talk (safety meeting) and may be used as an opportunity for education and training.

ITEMS WHICH MUST BE INCLUDED IN THE SWMS	COMPLETED	TO BE DONE	COMMENTS
The company details have been entered, including the project name and address.	<input type="checkbox"/>	<input type="checkbox"/>	
Names and signatures of all relevant personnel consulted during the development of the SWMS.	<input type="checkbox"/>	<input type="checkbox"/>	
Name, signature, position and date signed of the person approving the SWMS.	<input type="checkbox"/>	<input type="checkbox"/>	
Specific personnel and qualifications, experience is noted in the SWMS.	<input type="checkbox"/>	<input type="checkbox"/>	
Provides a step-by-step process of tasks required to carry out the activity or task.	<input type="checkbox"/>	<input type="checkbox"/>	
Adequate risk assessment of any identified hazards has been completed.	<input type="checkbox"/>	<input type="checkbox"/>	
Foreseeable hazards are identified and documented for each step.	<input type="checkbox"/>	<input type="checkbox"/>	
Any hazards listed in any site risk assessments have been added to the SWMS.	<input type="checkbox"/>	<input type="checkbox"/>	
SWMS initial risk (IR) column as well as residual risk (RR) columns completed.	<input type="checkbox"/>	<input type="checkbox"/>	
Check control measures added to the SWMS are the most effective solutions.	<input type="checkbox"/>	<input type="checkbox"/>	
Responsible person is assigned and listed on the SWMS for the implementation of control measures.	<input type="checkbox"/>	<input type="checkbox"/>	
Permit requirements specified, such as Hot Work, Electrical Work, Work at Heights etc.	<input type="checkbox"/>	<input type="checkbox"/>	
SWMS identifies plant and equipment to be used.	<input type="checkbox"/>	<input type="checkbox"/>	
Details of inspection checks required for any equipment listed are noted on the SWMS.	<input type="checkbox"/>	<input type="checkbox"/>	
Describes any mandatory qualifications, experience, training, skills required to perform the work.	<input type="checkbox"/>	<input type="checkbox"/>	
Applicable personal protective equipment is selected on the SWMS.	<input type="checkbox"/>	<input type="checkbox"/>	
Lists any required permits or licenses.	<input type="checkbox"/>	<input type="checkbox"/>	
Reflects and documents any legislative references and/or Australian Standards.	<input type="checkbox"/>	<input type="checkbox"/>	
Identifies any hazardous substances used with specific control measures in line with any SDS.	<input type="checkbox"/>	<input type="checkbox"/>	
<b>REVIEWED BY</b>		<b>DATE REVIEWED</b>	
<b>SIGNATURE</b>		<b>DATE COMPLETED</b>	